

# TOPAZ<sup>®</sup>32

Portable High-Performance Phased Array UT Instrument



# DELIVERING INSPECTION PERFORMANCE AND PRODUCTIVITY TO ALL INDUSTRIES

TOPAZ<sup>®</sup>32 is a 32-channel, high-performance phased array ultrasonic testing (PAUT) device with dual matrix array (DMA) support.

## Inspection Advantages

One of the many key advantages of the TOPAZ32 is that 2D matrix array probe support is now included without the need for any external software. This fully integrated and simplified approach can reduce the amount of equipment needed to perform an inspection.

With its rugged construction and airtight magnesium and rubber housing, TOPAZ32 is durable enough to handle inspections in even the harshest conditions. Its lightweight design makes the TOPAZ32 easily portable wherever you need to go.

TOPAZ32 portable 32 channel phased array is available in three versions:

- 32/128P - multi-group
- 32/128PR - multi-group with dual matrix array (DMA) support
- 32/128PR-TR - multi-group, DMA support and time reversal

## Maximize Your Productivity

TOPAZ32 users can complete the following all from the instrument :

**Prepare** specimen and weld for inspection and calibrate setup. The visual feedback from the onboard shape editor and advanced focal law calculator allows easy setup creation and optimization.

**Acquire** data in real-time in a range of views on the multi-touch screen. The calibration process is made easy with a complete calibration tool.

**Analyze** the data in different views and automatically produce a table of indications. A full set of basic (cursors, readings) and advanced (merge, C-Scan stitching, gate selectors, volumetric contour, thickness thresholding, etc.) analysis tools are available with fully configurable display layouts onboard.

**Report** in different levels to meet specific requirements. Ready-to-print custom PDF reports including hardware settings, scan plan, and indication information are generated with a single touch.



# SIZED FOR CONVENIENCE. BUILT TO PERFORM.

TOPAZ®32 boosts productivity, reduces job times, and can lower the total cost of equipment ownership.

## Benefits

- Phased array up to 32/128PR
- 2 conventional UT channels
- Multiple probes capability (2xPA + 2xTOFD)
- Up to 1024 focal laws
- 2D matrix array onboard support
- Time reversal option

## Streamlined Workflow

Advanced processing features and onboard calibration of the TOPAZ32 provide optimized layouts to accommodate phased array sensitivity, wedge delay, Time Corrected Gain (TCG), and velocity for each angle.

TOPAZ32 displays the calibration status for all channels (groups). If the relevant symbol is not green, the related parameter has not been calibrated. Scanning and data acquisition can only commence when all channels are showing as calibrated.

With a wide range of predefined onboard layouts to present data, users can create their own layout to meet specific requirements or personal preferences.



## Applications

- Multi-probe PAUT and TOFD on thick carbon steel welds up to 100 mm (4 in) thick
- Corrosion mapping
- Composite inspections with time reversal
- Stainless steel welds using DMA (Dual Matrix Array) probes
- Friction stir welds

## Powered by UltraVision Software

TOPAZ32 includes this powerful software onboard. Leverage a single software platform across the entire family of Zetec UT products, saving valuable training time and enabling new levels of system synergies. Benefit from powerful features including:

- Embedded advanced focal law calculator with visual feedback
- Onboard volumetric merge and measurement tools
- Interactive help onboard the instrument
- Remote control capabilities

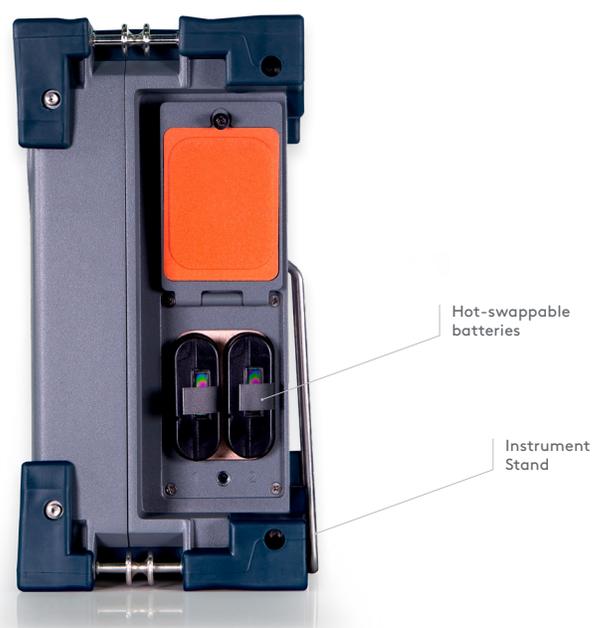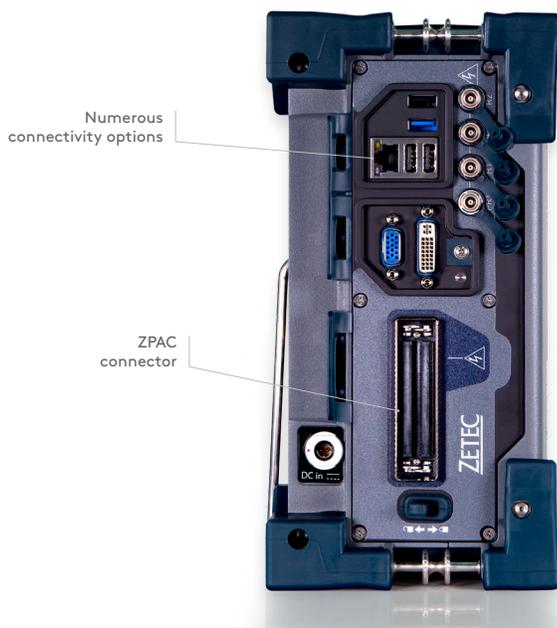

# SPECIFICATIONS

## INSTRUMENT

Dimensions (W x H x D)	26 x 13.2 x 32.6 cm (10.3 x 5.2 x 12.8 in)
Weight with 1 battery	6.3 kg (13.9 lb)
Multi-touch display	264 mm (10.4 in) wide, 1024 x 768 pixels
Air intake	No
Hot swappable batteries	Yes
Storage	120 GB SSD
Data interfaces	Ethernet 1000 Base-T; 1 x USB 3.0; 2 x USB 2.0
Video output	DVI (Digital and Analog)
Phased Array connector	ZPAC Connector (custom ZIF with latch)
Instrument calibration	Compliant with ISO 18563-1

## ENVIRONMENTAL

IP rating	Designed for IP66
Operating temperature	-10C to 45C (14F to 113F), with external fan kit: up to 53C (127F)
Storage temperature range	-40C to 70C (-40F to 158F)
Relative humidity	80% non-condensing

## PHASED ARRAY

Phased Array Channels	32/128 P or 32/128 PR
UT Channels	2 P/E or 2 P&C
Amplitude Resolution	16 bits
Measurement Gates	4 gates + 1 synchronization gate
Maximum PRF	12 kHz
Max. Pulser Voltage (Open Circuit)	105V PA UT/215V UT
Max. Applied Voltage (50 ohms)	75V PA UT/200V UT
Bandwidth (-3 dB)	from 0.5 to 18 MHz
Rectification	Digital
Filtering	Analog/Digital (FIR)
Smoothing (Video Filter)	Digital
Self-Check	Yes
Automated Probe Detection	Yes (with Zetec probe ID chip)
Focal Laws	1024
Maximum Number of Samples	8,192 - 16,384 (remote - UltraVision® 3)
Maximum Data File Size	2 GB onboard - 20 GB (remote using UltraVision® 3)
Encoder Interfaces	2 quadrature-type

The information in this document is accurate as of its publication. Actual products may differ from those presented herein. © 2022 Eddyfi Canada, Inc. Eddyfi Technologies, Eddyfi, Zetec, TOPAZ, UltraVision and their associated logos are trademarks or registered trademarks of Eddyfi Technologies (wholly owned subsidiary of Eddyfi Canada, Inc.) in Canada and/or other countries. Eddyfi Technologies reserves the right to change product offerings and specifications without notice. 28/03/22.

